30" built-in double ovens

	GE Profile™		GE®			GE Profile	GE
	Convection double ovens		Double ovens			Microwave double ovens	
	PT960SM PT960WM PT960BM	PT956SM PT956WM PT956CM PT956BM	JTP75SM JTP75WM JTP75CM JTP75BM	JTP55SM JTP55WM JTP55CM JTP55BM	JTP35SM JTP35WM JTP35CM JTP35BM	PT970SM PT970WM PT970CM PT970BB	JTP90SM JTP90WM JTP90CM JTP90BM
Features							
Oven Upper	Convection/self-clean	Convection/self-clean	Convection/self-clean	Self-clean	Self-clean	Microwave	Microwave
Oven Lower	Convection/self-clean	Thermal/self-clean	Self-clean	Self-clean	Standard	Convection/self-clean	Self-clean
Cleaning time	Variable	Variable	Variable	Variable	Variable (upper)	Variable (lower)	Variable (lower)
Automatic self-clean oven door lock	●	●	●	●	Upper	Lower	Lower
Self-clean oven w/Delay Clean option	●	●	●	●	Upper	Lower	Lower
Light self-clean option	●	●	●	●	Upper	Lower	Lower
TrueTemp™ system	●	●	●	●	Upper	Lower	Lower
Hidden bake oven interior	●	●	●	●	●	Lower	
Variable broil/Six-pass broil element	●	●	●	●	●	Lower	Lower
Eight-pass bake element	●	●	●	●	●	Lower	Lower
PreciseAir™ convection system	●	Upper	Upper			Lower	
Convection bake	Multi/single-rack	Multi/single-rack	Upper			Lower	
Convection roast	●	Upper	Upper			Lower	
Auto Recipe™ conversion	Upper	Upper	Upper			●	
SmartSet controls	LCD-Glass touch	Glass touch	●	●	Upper	●	●
Proof mode	●	Upper				Lower	
Oven meat probe	●	Upper				Lower	
Warm mode	●	Upper				Lower	
Temperature display	●	●	●	●	Upper	Lower	Lower
Delay bake option	●	●	●	●	Upper	Lower	Lower
C° and F° programmable	●	●	●	●	Upper	Lower	Lower
Audible preheat signal	●	●	●	●	Upper	Lower	Lower
Auto oven shut-off w/override	●	●	●	●	Upper	Lower	Lower
Electronic clock and kitchen timer	●	●	●	●	●	Lower	●
Control lock capability	●	●	●	●	Upper	Lower	Lower
Oven light	2	2	2	2	2	2 (Lower)	2 (Lower)
Certified Sabbath mode	●	●	●	●	Upper	Lower	Lower
Flat convection cover	●	●	●			Lower	
QuietBake™ fan system	●	●	●	●	●	Lower	Lower
Microwave oven features:							
Microwave cooking timer						99-min./99-sec.	99-min./99-sec.
Microwave power levels						10	10
Sensor functions						6	3
Electronic MWO touch controls						●	●
Microwave oven cavity (cu. ft.)						1.6	1.6
MWO power output watts						1000	1000
Turntable						●	●
Oven racks Upper	3 heavy-duty	3 heavy-duty	3 heavy-duty	2 heavy-duty	2 heavy-duty		
Oven racks Lower	3 heavy-duty	2 heavy-duty	2 heavy-duty	2 heavy-duty	2 heavy-duty	3 heavy-duty	2 heavy-duty
self-clean oven racks	●	●				●	
Embossed rack positions	7 upper/7 lower	7 upper/7 lower	7 upper/7 lower	7 upper/7 lower	7 upper/7 lower	7 lower	6 lower
Appearance							
Color appearance*	SS WW BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB	SS WW CC BB
Frameless oven doors	Stainless steel White glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass	Stainless steel White glass Bisque glass Black glass
Big ClearView™ windows	●	●	●	●	●	Lower	Lower
Oven door handles	Sculptured Stainless steel Sculptured white Sculptured black	Sculptured Stainless steel Sculptured white Sculptured bisque Sculptured black	Stainless steel White Bisque Black	Stainless steel White Bisque Black	Stainless steel White Bisque Black	Sculptured Stainless steel Sculptured white Sculptured bisque Sculptured black	Stainless steel White Bisque Black
Weights & Dimensions							
Approx. shipping wt. (lbs.)	257	256	251	250	250	210	208
Oven cabinet width required (in.)	30	30	30	30	30	30	30
Overall dimensions (WxHxD in inches)	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 52-7/8 x 23-1/2	29-3/4 x 43-1/2 x 23-1/2	29-3/4 x 43-1/2 x 23-1/2
Overall oven interior dimensions (WxHxD in inches) Upper	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	16-1/4 x 9-5/8 x 15-3/4	16-1/4 x 9-5/8 x 15-3/4
Overall oven interior dimensions (WxHxD in inches) Lower	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4	24 x 17-1/2 x 18-1/4
Power/Ratings							
KW rating @ 240V	7.2	7.2	7.2	7.2	8.0	6.6	6.6
KW rating @ 208V	6.4	6.4	6.4	6.4	6.4	5.3	5.3
Amps @ 240V	40	40	40	40	40	30	30
Amps @ 208V	40	40	40	40	40	30	30
Convection wattage	2500	2500				2500	
Broiler/bake wattage	2400/2100	2400/2100	2400/2100	2400/2100	2400/2100	3400/2100	3400/2100

*SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black.

Listed by Underwriters Laboratories

30" built-in double ovens (continued)

30" built-in double oven dimensions (in inches)

Models PT960, PT956, JTP75, JTP55, JTP35

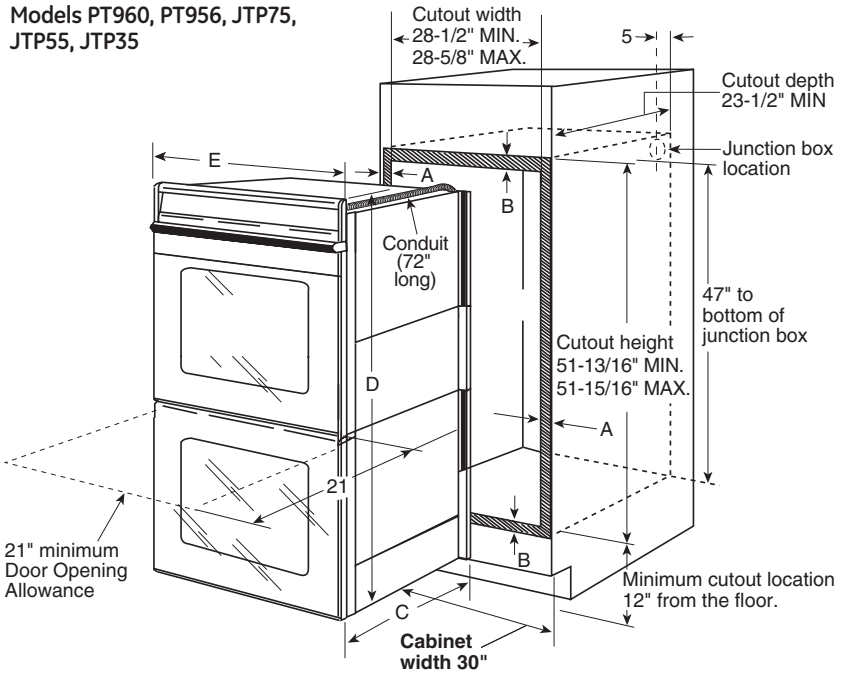

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT.
THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

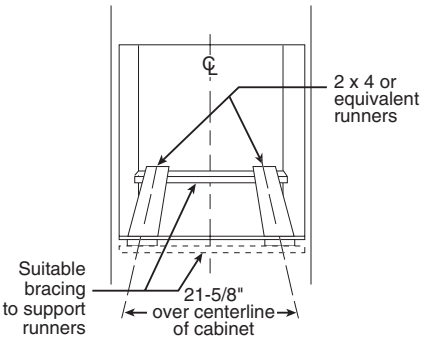

(Must support 325 lbs.)

Cabinet	30"
A – Overlap of oven over side edges of cutout	11/16" – 3/4"
B – Overlap of oven at top and bottom of cutout	1"
Oven	
C – Overall depth*	23-1/2"
D – Overall height with trim	53-3/8"
without trim	52-7/8"
E – Overall width	29-3/4"

*Depth including door handle is approximately 26-6/10" min. to 26-9/10" max.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: If marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

30" built-in microwave double oven dimensions (in inches)

Models PT970, JTP90

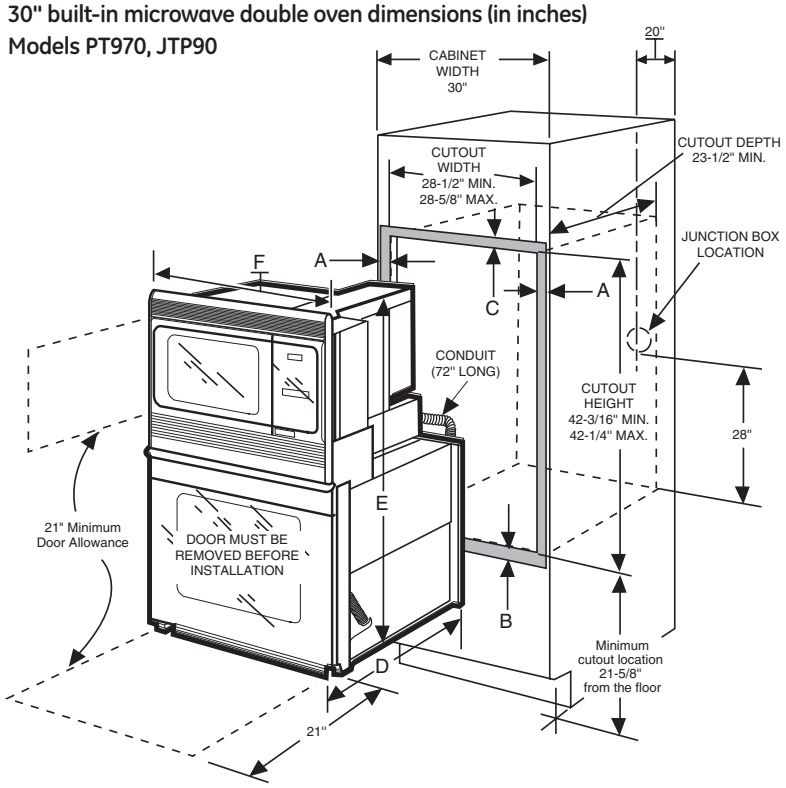

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT.
THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE.

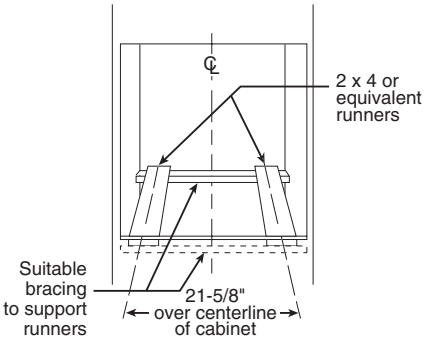

(Must support 275 lbs.)

Cabinet	30"
A – Overlap of oven over side edges of cutout	11/16"
B – Overlap of oven at bottom of cutout	1"
C – Overlap of oven at top of cutout	1/2"
Oven	
D – Overall depth*	23-1/2"
E – Overall height with trim	44"
without trim	43-1/2"
F – Overall width	29-3/4"

*Depth including door handle is approximately 26-6/10" min. to 26-9/10" max.

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: If marks, blemishes or the cutout opening is visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or openings are covered.

Note: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.